



## Operating Instructions

### Air Conditioner

**Model No.****Indoor Unit****CS-RZ80YKR****Outdoor Unit****CU-RZ80YKR**

English

### Operating Instructions

#### Air Conditioner

Before operating the unit, please read these operating instructions thoroughly and keep them for future reference.

Before installation, the installer should:


Read the Installation Instructions, then request the customer keep them for future reference.

Remove the remote control packed with the indoor unit.




ACXF55-33930

Provides maximum comfort with optimal energy saving methods.

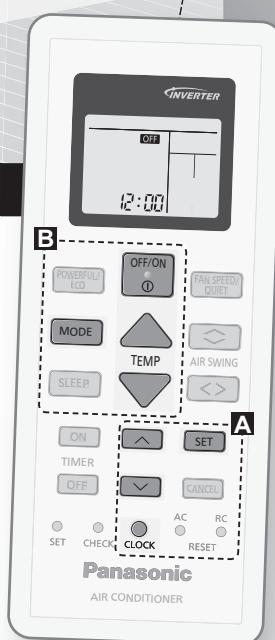

## Quick Guide

### Inserting the batteries



- ① Pull out the back cover of remote control.
- ② Insert AAA or R03 batteries.
- ③ Close the cover.

### A Clock setting




- ① Press **CLOCK**, then press **↑** to set the time.
  - Press **CLOCK** for approximately 5 seconds to show the time as 12-hour (am/pm) or 24-hour.
- ② Press **SET** to confirm.

Thank you for purchasing  
Panasonic Air Conditioner.

## Table of Contents

How to Use .....	4-5
To Learn More... .....	6-7
Cleaning the Air Conditioner .....	8
Troubleshooting .....	9-11

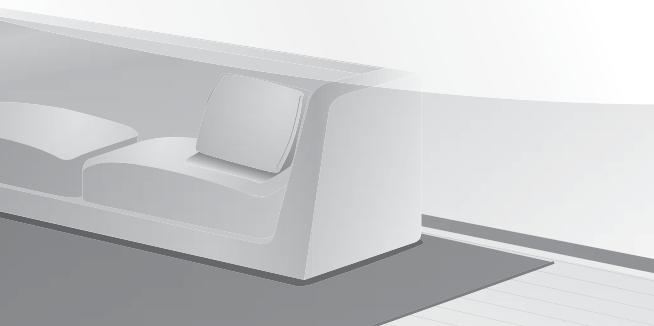

### Accessories

- Remote control
- AAA or R03 batteries × 2
- Remote control holder
- Screws for remote control holder × 2

The illustrations in this manual are for explanation purposes only and may differ from the actual unit. They are subject to change without notice.

## B Basic operation

① Press  to start/stop the operation.




- When the unit is ON, **OFF** disappears from the remote control display.

② Press  to select the desired mode.




③ Press TEMP UP, TEMP DOWN to select the desired temperature.




Selection range:  
16.0 °C ~ 30.0 °C /  
60 °F ~ 86 °F.

- Press  for approximately 10 seconds to show the temperature as °C or °F.

# How to Use

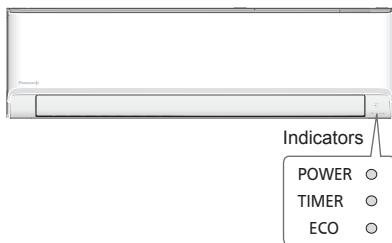


## To adjust airflow direction

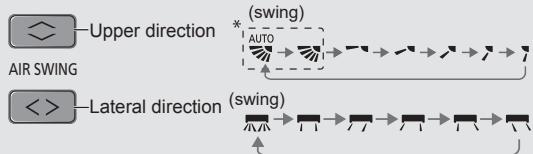

- Do not adjust the flap by hand.

\*For details operation, refer "To Learn More...."

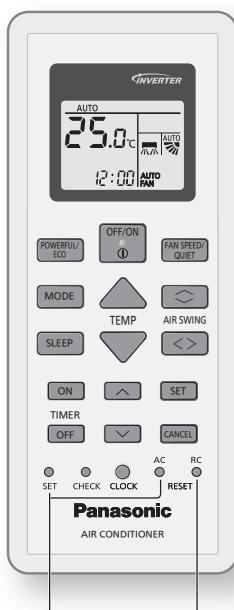

Not used  
in normal  
operation.

Press to restore  
the remote  
control to default  
setting.

## To adjust FAN SPEED and QUIET condition



### FAN SPEED:

- When AUTO FAN is selected, the fan speed is adjusted automatically according to the operation mode.
- Select the lowest fan speed (■) to have a low noise operation.

### QUIET:

- This operation reduces airflow noise.

## To switch between POWERFUL/ECO



POWERFUL → ECO → (exit setting)

### POWERFUL:

To reach the desired temperature quickly

- This operation is automatically stop after 20 minutes.

### ECO:

- To reduce power consumption for better energy saving without sacrificing comfort.


## To maximise comfort while sleeping



- This operation provides you with a comfortable environment while sleeping. It will automatically adjust the sleep pattern temperature during the activation period.
- The indoor unit indicator will dim when this operation is activated. This is not applicable if the indicator brightness has been manually dimmed.
- This operation is incorporated with the activation timer (0.5, 1, 2, 3, 4, 5, 6, 7, 8 or 9 hours).
- This operation can be set together with timer. Sleep operation has the priority over OFF timer.
- This operation can be cancelled by pressing the respective button until the sleep timer reaches 0.0h.

## To set the timer

You can set the timer to turn on and off the unit at 2 different preset time.



- Select TIMER ON or TIMER OFF.** Example: OFF at 22:00
  - Each time pressed:
- Set the time.**
- Confirm the setting.**

- To cancel the timer, press or to select the respective setting @1 or @2, then press .
- If the timer has been cancelled manually or due to power failure, you can restore the timer again. Press or to select the respective setting @1 or @2, then press .
- The nearest timer setting is displayed and will activate in sequence.
- The timer operation follows the clock setting on the remote control and will repeat daily when timer has been set. For clock setting, refer to Quick Guide.

## Note

, <ul style="list-style-type: none"> <li>Can be selected at the same time.</li> <li>Can be activated in all modes.</li> </ul>	, <ul style="list-style-type: none"> <li>POWERFUL, QUIET and FAN SPEED cannot be selected at the same time.</li> </ul>
---	--

# To Learn More...

## Operation mode

**AUTO** : The POWER indicator blinks at the initial stage.

- The unit will select an operation mode every 10 minutes depending on the setting and room temperature.

**HEAT** : The POWER indicator blinks at the initial stage. The unit will take some time to warm up.

- If the HEAT mode system has been locked, and other operation mode is selected, the indoor unit stops and the POWER indicator blinks.

**COOL** : Provides efficient comfort cooling to suit your needs.

**DRY** : Operates at low fan speed for a gentle cooling operation.

**FAN** : To circulate air in the room.

## Energy saving temperature setting

You may save energy when operating the unit within the recommended temperature range.

**HEAT** : 20.0 °C ~ 24.0 °C / 68 °F ~ 75 °F.

**COOL** : 26.0 °C ~ 28.0 °C / 79 °F ~ 82 °F.

## Air flow direction

**AUTO**  **In COOL/DRY mode:**

The horizontal flap is fixed at middle position setting.

Once the temperature is achieved, the horizontal flap swings up/down automatically.

**In HEAT mode:**

The horizontal flap is fixed at a predetermined position.

The vertical flap will swing according to the selection. If the vertical flap is set to auto in Heat mode, the vertical flap will swing left and right when the temperature rises.

** COOL/DRY mode:**

The horizontal flap swings up/down automatically.

**In HEAT mode:**

The horizontal flap is fixed to upper position when discharge air temperature is cold.

The horizontal flap swings up-down automatically when discharge air temperature is warm.

## Auto restart control

When power is resumed after a power failure, the operation will restart automatically with the last operation mode and airflow direction.

- This control is not applicable when TIMER is set.

## Operating conditions

Use this air conditioner in the temperature range indicated in the table.

Temperature °C (°F)		Indoor		Outdoor	
		DBT	WBT	DBT	WBT
COOL	Max.	32 (89.6)	23 (73.4)	46 (114.8)	26 (78.8)
	Min.	16 (60.8)	11 (51.8)	-10 (14.0)	-
HEAT	Max.	30 (86.0)	-	24 (75.2)	18 (64.4)
	Min.	16 (60.8)	-	-15 (5.0)	-

DBT: Dry bulb temperature, WBT: Wet bulb temperature

To Learn More...


English

# Cleaning the Air Conditioner

Cleaning has to be carried out at regular intervals to ensure the unit is at optimal performance. A dirty unit may cause malfunction and you may retrieve "H 99" error code. Consult an authorised dealer.

- Before cleaning, switch off the power supply and unplug the unit.
- Do not touch the aluminium fin as the sharp parts may cause injury.
- Do not use benzine, thinner or scouring powder.
- Use soap ( $\simeq$  pH 7) or neutral household detergent only.
- Do not use water hotter than 40 °C / 104 °F.

## Indoor unit

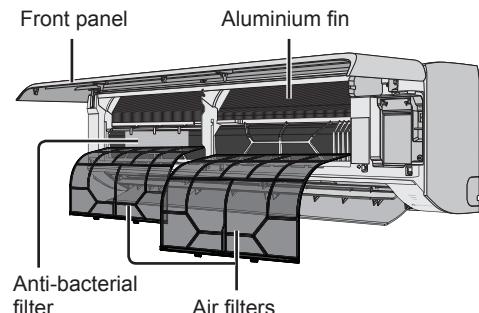

### Indoor unit

Do handle the unit surface with care to avoid scratches by sharp or rough items (e.g. fingernails, tools, rings, etc). Wipe the unit gently with a soft damp cloth. The coils and fans should be cleaned periodically by an authorised dealer.




### Front panel

Wash gently and dry.


### How to remove front panel

① Raise up.

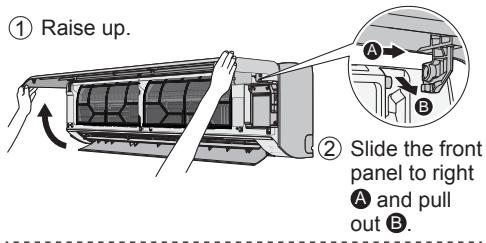

### Close it securely

① Hold horizontally.

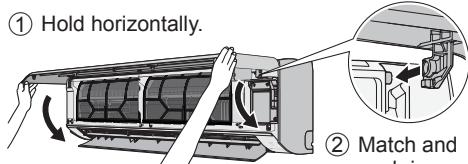

③ Close down.

④ Press both ends and center of the front panel.

### Outdoor unit

Clean the debris that surround the unit. Clear any blockage from the drain pipe.




### Air filters

Once every 2 weeks

- Wash/rinse the filters gently with water to avoid damaging the surface.
- Dry the filters thoroughly under a shade, away from fire or direct sunlight.
- Replace any damaged filters.




### Remove air filter




Remove from the unit

### Attach air filter



Insert into the unit

### Anti-bacterial filter



Anti-bacterial filter.

- Clean the filter whenever necessary.
- Wash/rinse the filter gently with water to avoid damage to the filter.
- Dry the filter thoroughly under a shade, away from fire or direct sunlight.
- Replace the filter every 10 years or replace any damaged filter. Part no.: CZ-SA22P

# Troubleshooting

The following symptoms do not indicate malfunction.

Symptom	Cause
POWER indicator blinks before the unit is switched on.	<ul style="list-style-type: none"><li>• This is the preliminary step to prepare for the TIMER operation after it has been set.</li><li>• When Timer is set ON, the unit may start earlier (up to 35 minutes) before the actual set time to achieve the desired temperature on time.</li></ul>
POWER indicator blinks during HEAT mode with no warm air supply (and flap is closed).	<ul style="list-style-type: none"><li>• The unit is in defrost mode (and AIR SWING has been set to AUTO).</li></ul>
POWER indicator blinks, then stops blinking during COOL/DRY mode.	<ul style="list-style-type: none"><li>• The system has been locked to operate in HEAT mode only.</li></ul>
TIMER indicator is always ON.	<ul style="list-style-type: none"><li>• When Timer has been set, the Timer setting repeats daily.</li></ul>
Operation is delayed a few minutes after restarting.	<ul style="list-style-type: none"><li>• The delay is a protection to the unit's compressor.</li></ul>
Cooling/heating capacity is reduced during lowest fan speed setting.	<ul style="list-style-type: none"><li>• The lowest fan speed is to have a low noise operation, so cooling/heating capacity may be reduced depending on the condition. Increase the fan speed to increase the capacity.</li></ul>
Indoor fan stops occasionally during heating operation.	<ul style="list-style-type: none"><li>• To avoid unintended cooling effect.</li></ul>
Indoor fan stops occasionally during automatic fan speed setting.	<ul style="list-style-type: none"><li>• This is to help remove the surrounding odour.</li></ul>
Airflow continues even after operation has stopped.	<ul style="list-style-type: none"><li>• To extract the remaining heat from the indoor unit (maximum 30 seconds).</li></ul>
The room has a peculiar odour.	<ul style="list-style-type: none"><li>• This may be due to damp smell emitted by the wall, carpet, furniture or clothing.</li></ul>
Cracking sound during operation.	<ul style="list-style-type: none"><li>• Changes in temperature caused the unit to expand and contract.</li></ul>
Water flowing sound during operation.	<ul style="list-style-type: none"><li>• Refrigerant flow inside the unit.</li></ul>
Mist emerges from indoor unit.	<ul style="list-style-type: none"><li>• During cooling operation, the discharged cold air may condense to water vapour.</li></ul>
Outdoor unit emits water or steam.	<ul style="list-style-type: none"><li>• During cooling operation, condensation occurs on cold pipes and the condensed water may drip from the outdoor unit.</li><li>• During heating operation, frost formed on the outdoor unit during deice cycle melts and is discharged as water or steam.</li></ul>
Discoloration of some plastic parts.	<ul style="list-style-type: none"><li>• Discoloration is subjected to the types of materials used in plastic parts. It is accelerated when exposed to heat, sun light, UV light or environmental factors.</li></ul>


Check the following before calling for servicing.

Symptom	Check
Operation in HEAT/COOL mode is not working efficiently.	<ul style="list-style-type: none"><li>• Set the temperature correctly.</li><li>• Close all doors and windows.</li><li>• Clean or replace the filters.</li><li>• Clear any obstruction at the air inlet and air outlet vents.</li></ul>
Noisy during operation.	<ul style="list-style-type: none"><li>• Check if the unit has been installed at an incline.</li><li>• Close the front panel properly.</li></ul>
Remote control does not work. (Display is dim or transmission signal is weak.)	<ul style="list-style-type: none"><li>• Insert the batteries correctly.</li><li>• Replace weak batteries.</li></ul>
The unit does not work.	<ul style="list-style-type: none"><li>• Check if the circuit breaker is tripped.</li><li>• Check if timers have been set.</li></ul>
The unit does not receive the signal from the remote control.	<ul style="list-style-type: none"><li>• Make sure the receiver is not obstructed.</li><li>• Certain fluorescent lights may interfere with the signal transmitter. Consult an authorised dealer.</li></ul>

# Troubleshooting

## When...

### ■ The remote control is missing or a malfunction has occurred



1. Raise the front panel.
2. Press AUTO OFF/ON once to use in AUTO mode.
3. Press AUTO OFF/ON until you hear 1 beep, then release to use in forced COOL mode.
4. Press AUTO OFF/ON until you hear 2 beeps, then release to use in forced HEAT mode.
5. Press AUTO OFF/ON again to turn off the unit.

### ■ The indicators are too bright

- To dim or restore the indicators' brightness on the unit, press on the remote for 5 seconds.

### ■ Conducting a seasonal inspection after extended period of non-use

- Check the batteries.
- Check that there is no obstruction around the air inlets and outlet vents.
- Use AUTO OFF/ON on the unit to select COOL or HEAT mode. For details, refer "The remote control is missing or a malfunction has occurred" above. After 15 minutes of operation, it is normal to have the following temperature difference between the air inlet and outlet vents:

**COOL:  $\geq 8^{\circ}\text{C} / 14.4^{\circ}\text{F}$**  **HEAT:  $\geq 14^{\circ}\text{C} / 25.2^{\circ}\text{F}$**

### ■ The units will not be used for an extended period

- Activate HEAT mode for 2~3 hours to remove any moisture left in the internal parts thoroughly. This is to prevent mould growth.
- Turn off the power supply and unplug the unit.
- Remove the batteries from the remote control.

## NON SERVICEABLE CRITERIAS


TURN OFF THE POWER SUPPLY AND UNPLUG THE UNIT. Then consult an authorised dealer in the following conditions:

- Abnormal noise during operation.
- Water/foreign particles have entered the remote control.
- Water is leaking from the indoor unit.
- The circuit breaker switches off frequently.
- The power cord becomes unnaturally warm.
- The switches or buttons are not functioning properly.

## How to retrieve error codes

If the unit stops and the TIMER indicator blinks, use the remote control to retrieve the error code.

- ① Press for 5 seconds
- ③ Press for 5 seconds to quit checking
- ② Press until you hear beep sound, then write down the error code
- ④ Turn the unit off and inform the error code to an authorised dealer.



• For certain errors, you may restart the unit for limited operation if there are 4 beeps when operation starts.

Diagnostic display	Abnormality/Protection control
H 00	No memory of failure
H 11	Indoor/outdoor abnormal communication
H 12	Indoor unit capacity unmatched
H 14	Indoor intake air temperature sensor abnormality
H 15	Outdoor compressor temperature sensor abnormality
H 16	Outdoor current transformer (CT) abnormality
H 17	Outdoor suction temperature sensor abnormality
H 19	Indoor fan motor mechanism lock
H 21	Indoor float switch operation abnormality
H 23	Indoor heat exchanger temperature sensor 1 abnormality
H 24	Indoor heat exchanger temperature sensor 2 abnormality
H 25	Indoor ion device abnormality
H 26	Minus ION abnormality
H 27	Outdoor air temperature sensor abnormality
H 28	Outdoor heat exchanger temperature sensor 1 abnormality
H 30	Outdoor discharge pipe temperature sensor abnormality
H 31	Abnormal swimming pool sensor
H 32	Outdoor heat exchanger temperature sensor 2 abnormality
H 33	Indoor/outdoor misconnection abnormality
H 34	Outdoor heat sink temperature sensor abnormality
H 35	Indoor/outdoor water adverse current abnormality
H 36	Outdoor gas pipe temperature sensor abnormality
H 37	Outdoor liquid pipe temperature sensor abnormality
H 38	Indoor/outdoor mismatch (brand code)
H 39	Abnormal indoor operating unit or standby units

Diagnostic display	Abnormality/Protection control
H 41	Abnormal wiring or piping connection
H 50	Ventilation fan motor locked
H 51	Ventilation fan motor locked
H 52	Left-right limit switch fixing abnormality
H 58	Indoor gas sensor abnormality
H 59	Eco sensor abnormality
H 64	Outdoor high pressure sensor abnormality
H 67	nanoe abnormality
H 70	Light sensor abnormality
H 71	DC cooling fan inside control board abnormality
H 72	Abnormality tank temperature sensor
H 85	Abnormal communication between indoor & wireless LAN module
H 97	Outdoor fan motor mechanism lock
H 98	Indoor high pressure protection
H 99	Indoor operating unit freeze protection
F 11	4-way valve switching abnormality
F 16	Total running current protection
F 17	Indoor standby units freezing abnormality
F 18	Dry circuit blocked abnormality
F 87	Control box overheat protection
F 90	Power factor correction (PFC) circuit protection
F 91	Refrigeration cycle abnormality
F 93	Outdoor compressor abnormal revolution
F 94	Compressor discharge pressure overshoot protection
F 95	Outdoor cooling high pressure protection
F 96	Power transistor module overheating protection
F 97	Compressor overheating protection
F 98	Total running current protection
F 99	Outdoor direct current (DC) peak detection

\* Some error code may not be applicable to your model. Consult an authorised dealer for clarification.

**Panasonic Corporation**  
1006, Oaza Kadoma, Kadoma City,  
Osaka 571-8501, Japan  
Website: <http://www.panasonic.com>  
© Panasonic Corporation 2022  
Printed in Malaysia

**ACXF55-33930**  
SS0922-0